



Stay connected to us!

HOT SHEET

SEASONAL & INNOVATIVE PRODUCTS FOR EVERY INDUSTRY

PRODUCT HIGHLIGHT

NEW

ENERGIZER RECHARGEABLE BATTERIES

Environmental responsibility meets inspired technology - introducing the world's first AA/AAA rechargeable battery made with 4% recycled batteries. The same innovation we brought to *Energizer EcoAdvanced*, we now bring to *Energizer Recharge* batteries. Now you can save money and have less impact on the planet by reducing the number of disposed batteries, creating less waste. By using *Energizer Recharge* batteries for digital cameras, handheld GPS devices, wireless gaming systems, toys, you name it - you can experience the convenience and value of innovative, industry-leading rechargeable battery technology.



Part No.
715.9100



For more videos on these and other products, visit our YouTube channel!



Part No.
715.9200

Go Green and Save!

Part No.	Description
715.9100	Recharge Pro Charger
715.9200	Universal Charger
715.9000	Recharge Power Plus AA - 4 pack batteries
715.9001	Recharge Power Plus AA - 8 pack batteries
715.9010	Recharge Power Plus AAA - 2 pack batteries
715.9011	Recharge Power Plus AAA - 4 pack batteries




Part No.
715.9000



BOLTS — CARRIAGE SHAKER SCREEN (F911)

ANSI B1.1 1986	Tensile Strength PSI Min.:	180,000
	Material:	Alloy Steel
	Plating:	Plain

Diameter	D	1/2"	5/8"	3/4"
Head Height Max	H	.270	.344	.406
Head Dia.	A	1.094	1.344	1.594
Square Width Max	O	.515	.642	.768

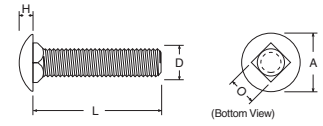

UNC	D	L	UNC	D	L	UNC	D	L
236.0.12.112	1/2"	1-1/2"	236.0.12.6	1/2"	6"	236.0.58.512	5/8"	5-1/2"
236.0.12.2	1/2"	2"	236.0.58.2	5/8"	2"	236.0.58.6	5/8"	6"
236.0.12.212	1/2"	2-1/2"	236.0.58.212	5/8"	2-1/2"	236.0.34.312	3/4"	3-1/2"
236.0.12.3	1/2"	3"	236.0.58.3	5/8"	3"	236.0.34.4	3/4"	4"
236.0.12.312	1/2"	3-1/2"	236.0.58.312	5/8"	3-1/2"	236.0.34.412	3/4"	4-1/2"
236.0.12.4	1/2"	4"	236.0.58.4	5/8"	4"	236.0.34.5	3/4"	5"
236.0.12.412	1/2"	4-1/2"	236.0.58.412	5/8"	4-1/2"	236.0.34.512	3/4"	5-1/2"
236.0.12.5	1/2"	5"	236.0.58.5	5/8"	5"	236.0.34.6	3/4"	6"

NEW FILL-IN SIZES



ELECTRICAL

ATO FUSES

NEW



Part No.	Description
731.035	ATO Fuse Blue - Green 35 Amp
731.035.1	100 Pack ATO Fuse Blue - Green 35 Amp

- ATO® fuses were originally developed for the automotive industry, but are now used in a wide variety of electronic applications
- Color coded for easy identification
- All fuses have a 32 voltage rating




LANTERN BATTERY

NEW

Part No.	Description
715.7580	6 Volt Lantern Battery Energizer

- Battery Chemistry Alkaline
- Voltage 6.0
- Spring Type Terminal
- Standards ANSI



Other Great Uses



NEW FILL-IN SIZE

HEAVY DUTY SCREW MOUNTS

Part No.	Description
555.722	Heavy Duty Impact Resistant Screw Mount .327 Slot UV Black
555.723	Heavy Duty Impact Resistant Screw Mount .363 Slot UV Black

- Designed to be used with our 120 lb., 175 lb., or 250 lb. heavy duty cable ties
- Made with Impact-Resistant Heat-Stabilized UV Black material to withstand repeated high impacts, vibration, extreme temperatures and weathering

LASHING TIE



Part No.	Description	MTS*	MBD*	L	W
881.9035	White Lash Type	120 lbs	4"	15-1/4"	.30" (5/16")
881.9036	Black Lash Type	120 lbs	4"	15-1/4"	.30" (5/16")
881.9038	Black Lash Type	120 lbs	5"	18.4"	.30" (5/16")
881.90430	White Lash Type	175 lbs	5"	18"	.31" (5/16")
881.90440	Black Lash Type	175 lbs	5"	18"	.31" (5/16")
881.9039	White Lash Type	175 lbs	7"	25"	.34" (11/32")
881.9040	Black Lash Type	175 lbs	7"	25"	.34" (11/32")
881.9041	White Lash Type	175 lbs	11"	37.2"	.34" (11-32")
881.9042	Black Lash Type	175 lbs	11"	37.2"	.34" (11-32")
881.90470	Black Lash Type	175 lbs	11"	36"	.35" (11/32")
881.9045	White Lash Type	175 lbs	14-1/2"	48.5"	.34" (11/32")
881.9046	Black Lash Type	175 lbs	14-1/2"	48.5"	.34" (11/32")



WINZER POWER-SOLV ENERGIZED ELECTRICAL CLEANER

Part No.	Description
891.7070	16 oz Aerosol Can




- Powerful solvent degreaser and moisture displacer
- Non-Flammable, Non-Conductive
- VOC-Compliant in California and all 50 States
- 29,000 Volt Dielectric Strength (29 KV)
- **Applications:** electric motors, electronic equipment, metal parts, ignition systems, refrigeration equipment, generators, power tools, etc.
- Trichloroethylene and tetrachloroethylene based formula
- **CAUTION:** Product must be tested prior to using on any plastic. NOT for use on computers or data processing equipment. May harm some plastics.

FULL CONTACT - CONTACT AND CIRCUIT BOARD CLEANER

Part No.	Description
891.7110	16 oz Aerosol Can



- Fast-drying cleaner; safe to use on most plastics, rubber and metal
- Dielectric strength: 25,000 volts
- Flammable – use only on de-energized equipment
- Quickly removes oil, grease, dirt, fingerprints and grime



Always check your voltage!
Energized cleaners can be used on equipment that cannot be de-energized (i.e. electric motors) but make sure your cleaner has a high enough dielectric strength.

3M SILICONE PASTE

Part No.	3M Part No.	Container Size
823.08946	08946	8 oz Can



- 100% dielectric silicone compound
- Resistant to water and prevents oxidation
- Lubricates rubber or plastic parts such as weatherstrips, "O" rings and rubber bushings
- Seals ignition systems
- Very good dielectric properties



BREAK-THRU NON-FLAMMABLE PENETRANT-LUBRICANT

Part No.	Description
891.7235	16 oz Can



- Clear penetrating lubricant and moisture displacer
- Non-flammable and non-conductive
- 30,000 Volt Dielectric Strength (30 KV)
- Protective lubricant prevents rust and corrosion
- Powerful penetration of moisture and rusted parts
- Drives off moisture – effective on dry or wet surfaces
- **Applications:** start wet engines, freeing nuts and bolts, electrical panel boards, drying out ignition wires, parking meters, motors, wire cable, rusted parts, engines, machine parts, door hinges, locks, battery terminals, vending machines, refrigeration equipment, airplanes, laundromats

FIREBLOCK POLYURETHANE FOAM SEALANT



Part No.	Net Contents	Package
891.73125	24 oz	Gun Sealant
891.73122		Application Gun (trigger)

- Multiple purpose, one-component fire resistant polyurethane foam
- Assists in preventing air and moisture infiltration
- Fills gaps between combustible finish materials and walls
- Dries tack-free in approximately 5 minutes,
- Fully cures within 24 hours depending on moisture and temperature conditions
- Adheres to almost all building materials
- Cured foam is resistant to temperatures ranging between -200°F to +240°F (-129°C to +115°C)
- Use gun sealant with application gun 891.73122
- Will not harm electrical wire insulations, Romex®, rubber, PVC, polyethylene or other plastic
- Approved for use around wires, plumbing penetrations, etc.
- Color: Orange (for easy identification by code officials)
- **Applications:** fill and seal around gaps, beneath base plates, mud sills, corner joints, t-joints, exterior cracks, around utility panels, pipes, penetrations, filling cracks, crevices, and to fill smaller cavities on flat or irregular surfaces

CRC POWER TUBE DI-ELECTRIC GREASE

Part No.	Description
891.8545	6 oz Tube

- Electrical panels, outdoor lighting, scoreboards, traffic lights, high voltage poles, transformers, disconnects
- Non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating
- Switching mechanisms, electrical contacts, spark plugs, battery terminals, fasteners, o-rings, rubber and plastic parts
- Waterproofs electrical connections and components
- Improves electrical performance in adverse weather conditions
- Pressurized power tube dispenser



CRC ZINC IT® INSTANT COLD GALVANIZE

Part No.	CRC Part No.	Net Weight	Can Size
891.8601	18412	13 oz (369 g)	16 fl oz

- 95% pure zinc-enriched coating protects ferrous metal from rusting and oxidizing
- Electrochemically bonds to metal surfaces, providing protection of hot-dipped galvanize
- Quick drying; dries to touch in 15-30 minutes, allowing treated parts to be handled quickly

**INSULATING VARNISH
SEYMOUR®**

- Varnish for sealing and insulating electrical windings and other components
- Quickly dries to a tough, glossy, flexible film
- Excellent, protective coating for electrical equipment
- Protects against moisture and corrosion
- High arc resistance and dielectric strength

Part No.	Net Weight	Can Size	Color
891.762	16 oz (454 g)	20 fl oz	Red

- Resists acids, oil, alkalis and heat
- Seals and readily sheds dirt
- **Applications:** electrical equipment, motor end windings, commutator ends, field coils, armatures, switchboard parts, bus bars and other exposed metal parts



SHOP SUPPLIES

UNIVERSAL HI-VIS CAUTION ABORBENTS

Single Pad Part No.	Case Part No.	Case Qty	Description
865.2112	865.2112.1	100	15" x 18" Pad
865.2113		1	30" x 150' Roll

- Hi-Vis yellow w/the international symbol for slip hazard repeating throughout the product making it ideal for use anywhere from factory to hospitality
- Spunbond side is abrasion-resistant, great for foot traffic or heavy-duty wiping applications
- Fine fiber side grips smooth surfaces (like cement) to reduce slips, trips and falls
- Absorbs most non-aggressive fluids, including oil (hydrocarbon-based fluids), water, glycols
- Perforated to help reduce waste



PROFESSIONAL GRADE VINYL ELECTRICAL TAPE

Part No.	Size	Color
888.600	3/4" x 60'	Black
888.601	3/4" x 60'	Red
888.602	3/4" x 60'	Blue
888.603	3/4" x 60'	Yellow
888.604	3/4" x 60'	White
888.605	3/4" x 60'	Green
888.606	3/4" x 60'	Orange
888.607	3/4" x 60'	Brown
888.608	3/4" x 60'	Purple



- 7 mil thickness
- Cold and heat resistant. Resists UV rays, acids, alkalis, abrasion, moisture and corrosion
- Maximum 600 volts
- **Maximum Temperature: 176°F (80°C)**
- Meets ASTM D-3005 and HHI-585 specifications

SCOTCH® FIRE RETARDANT ELECTRIC ARC PROOFING TAPE 77

Part No.
823.42006

- 3" x 20' roll
- Designed to protect all types of electric cables where exposed to potential failures of other high voltage cables or exposed to other high energy cables
- Extremely conformable, easily wraps irregular shapes
- Provides fault arc protection to adjacent wrapped cables and accessories
- Self-extinguishing, will not propagate flame
- Non-corrosive to metallic cable sheaths and compatible with synthetic cable jackets (i.e. semiconducting URD type, polyethylene, PVC, etc.)
- Resistant to water, salt water, acids, sewage and ultraviolet light
- **Thickness: 30 mils (.030")**
- **Color: Black**



3" CUT-OFF TOOL

Part No.
697.215




Specifications:

- Wheel size: 3" x 3/8" hole
- Free speed: 20,000 rpm
- Overall length: 7-1/2"
- Net weight: 1-3/4" lbs
- Air inlet thread: 1/4" NPT
- Air hose ID size: 3/8"
- Avg. air consumption: 6 cfm
- Air pressure: 90-120 psi
- Self-locking throttle lever
- Chrome plated steel spark guard
- Build-in speed regulator
- Heavy duty motor for tough cutting jobs

WINZER FOLDING UTILITY KNIFE

Part No.
980.2111

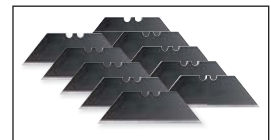

- Heavy-duty construction
- Blade folds away for safety
- Handy belt clip for portability
- Uses any standard utility knife blade
- Comes with 10 replacement blades
- Use utility blade **690.992** as replacement

PLASTIC HANDLE "TOOTHBRUSH" SCRATCH BRUSHES



Part No.	Description
690.8450	Stainless Steel Bristles
690.8451	Brass Bristles
690.8452	Nylon Bristles

TOUGH SWEEP - MEDIUM

Part No.
691.2018



- For wet or dry sweeping rough or semi-smooth concrete, wood, asphalt, etc.
- Black plastic 3-1/8" bristles
- 18" wide clear lacquered hardwood block
- Comes with 5 ft. hardwood lacquered handle

FALL TECH - HARNESS



Part No.	Description
865.2003	Full Body Harness Unifit w/pad
865.2002	Full Body Harness Unifit 3D

All of our harnesses are proudly made by hand right here in the USA, and are truly a cut above. We start with the highest quality polyester and aramid webbings and finish them off with our own proprietary hardware and accessory parts. Even our most basic harness webbing exceeds OSHA and ANSI requirements for tensile strength by more than 1,300 lbs.



FALL TECH - CARABINER

Part No.	Description
865.2009	Medium 1-1/8"



FallTech offers a range of double locking snap hooks and carabiners to be used as connecting elements for a variety of applications for fall arrest. Specifically designed to prevent roll-out or accidental opening, all FallTech connectors are thoroughly tested and conform to OSHA and ANSI standards.

CUTTING PLIERS



Part No.	Description
700.6326	6" Long Nose Plier w/Side Cutter
700.6317	7-1/2" Long Nose Plier w/Side Cutter



Part No.	Description
700.6368	8-1/2" Linemens Plier
700.6369	9-1/2" Linemens Plier



Part No.	Description
700.6435	5" Diagonal Cutting Plier
700.6337	7" Diagonal Cutting Plier



Part No.	Description
700.6357	7-1/2" End Cutting Plier
700.6358	8" End Cutting Plier



- Channellock® brand
- Polished high carbon drop forged steel
- Perfectly mated cutter is heat treated to hold its edge



For more tools like this, see our complete catalog online!

FLUID POWER

GATES EQUIPMENT

MOBILE CRIMP® 4-20 CRIMPER

This light-weight versatile crimper combines the latest crimping technology with old-fashioned toughness and durability.

- Capacity: Up to 1-1/4" 4 spiral-wire hose
- Weight: 57 lbs
- Two control options

POSITIVE STOP CONTROL

Part No.
899.050.2*

No settings necessary, color-coded spacer rings control the crimp. Just hold the start button until the ram extends to a fixed "stop" for each crimp, then release. Controlled crimp stroke for ease of repeatability.

*Order dies and spacer rings to fit your needs



DIGITAL DIAL CONTROL

Part No.
899.050.1*

Just dial in appropriate crimp setting and hold the start button until light comes on and buzzer sounds, then release. Ability to lock in setting for multiple assemblies. Light and buzzer operate on two "AAA" batteries.

*Order dies and spacer rings to fit your needs



MOBILE CRIMP® POSITIVE STOP SPACER RINGS

Part No.	Description	Gates Part No.
899.053.1	Spacer Ring B1	B1
899.053.2	Spacer Ring B3	B3
899.053.3	Spacer Ring R2	R2
899.053.4	Spacer Ring R3	R3
899.053.5	Spacer Ring R4	R4
899.053.6	Spacer Ring W2	W2
899.053.7	Spacer Ring W3	W3
899.053.8	Spacer Ring W4	W4

MOBILE CRIMP® DIE SETS

Part No.	Description	Gates Part No.
899.052.1*	Die Set 1/4"	MC21
899.052.2	Die Set 3/8"	MC22
899.052.3	Die Set 1/2"	MC33
899.052.4	Die Set 5/8"	MC34
899.052.5	Die Set 3/4"	MC35
899.052.6	Die Set 1"	MC37

*MC21 is acceptable replacement for MC31 die set. (MC21 die has 16 crimp fingers, better crimp. MC31 has only 8)

(ALL EQUIPMENT WILL BE DROP SHIPPED FROM THE FACTORY)

*All Gates Equipment is sold separately. Order the crimper, power supply, dies and spacer rings to fit your needs.

MOBILECRIMP® 4-20 POWER SOURCES

<u>Part No.</u>	<u>Description</u>
899.051.1	Hand Pump


- No power source needed
- Economical, convenient and portable for use anywhere
- Make factory-quality assemblies in the field to minimize downtime
- Pressure Rating: 10,000 psi
- **Weight: 25.6 lbs**



SHOP AIR PUMP

<u>Part No.</u>
899.051.2

- Works off standard shop air (90 psi)
- Economical, convenient and versatile for use wherever 90 psi compressed air is available
- Pressure Rating: 10,000 psi
- **Weight: 10 lbs**

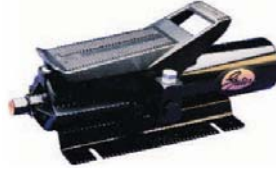

1/4 HP 12 VOLT DC PUMP

<u>Part No.</u>
899.051.3

- Mobile operation, runs on standard 12 volt car/truck battery or a 12 volt portable battery pack
- Ideal for tough jobs in the field
- Pressure Rating: 10,000 psi
- **Weight: 20.5 lbs**



*All Gates Equipment is sold separately. Order the crimper, power supply, dies and spacer rings that fit your needs. Wide selection of pumps to match all your power needs.

TOP POST BATTERY POST / TERMINAL CLEANER

- Highest quality cleaner of it's kind
- Brush will not twist loose
- Clean top terminals / top posts
- Great for battery cable ends
- Ensures a great connection



<u>Part No.</u>
694.5005

BATTERY HYDROMETER

- Temperature compensating
- Obtain direct, accurate readings
- Wide range of 1.100 - 1.300 sg.
- Unbreakable, easy to read



<u>Part No.</u>
694.5000

TRACTOR & WORK FLOOD LIGHT

<u>Part No.</u>	<u>PM Part No.</u>
727.500	504HF

REPLACES:

<u>PM</u>	<u>Truck-Light</u>	<u>Signal-Stat</u>
504HF	80395	629WD



Heavy-Duty lamp with 4" x 6" lens functions as tractor or general work light. Features H3 53-watt halogen replaceable bulb, polycarbonate housing and black-plated mounting bracket for corrosion-free service.

Use Bulb # **724.24.64156** for 24 Volt Applications

BACK-UP ALARM

<u>Part No.</u>	<u>Description</u>
727.705	97 decibels
727.706	102 decibels



- Single sound level at 97 decibels
- Glass filled nylon housing provides rugged durability
- All internal components are covered in epoxy for protection from vibration and moisture
- Operates in 12 to 24 volts systems and draws less than .5 amp

MINI BACK-UP ALARM

<u>Part No.</u>
727.708



- Single sound level at 97 decibels
- Rugged and compact design allows replacement of unnecessarily large and bulky alarms
- Operates in 12 to 36 volts and draws less than 0.1 amps
- Meets S.A.E. J994, type C
- Size: 4"W x 2"D x 2.5"H

TRACTOR / IMPLEMENT LIGHT

<u>Part No.</u>	<u>PM Part No.</u>
727.505	M507

REPLACES:

<u>PM</u>	<u>Truck-Light</u>	<u>Signal-Stat</u>	<u>Grote</u>
M507	80360-3	620W-3	64931



Rubber molded housing cushions light from shock and vibration. Universal 5/16" mounting stud and adjustable zinc-plated bracket allows mounting in any position. 10" lead wire exits through back of housing.

FORKLIFT APPROACH WARNING LIGHT

Alerts pedestrians of forklifts approaching blind corners or forklifts entering and exiting trailers. The Blue LED light projects an intense spotlight 10 to 20 feet ahead of the forklift to alert the pedestrian of nearby traffic. Can be installed on the front or back of any forklift, sweeper or any other piece of industrial equipment.

<u>Part No.</u>
727.515



- Input: 9-64 DC multi-voltage
- Light Type: 1- 3W Cree Blue LED, IP67 rate, 7G Shock Resistant
- LED Life Rating: 50,000 hours
- Size: 2.8"W x 2.6"H x 3"D
- Mounting Bracket: 140 degree swivel
- Cable Length: 12" with clips

BLUE BODY, BLUE LED LENS WITH STRAP AND TWIST ON MAGNET

<u>Part No.</u>
727.520



- Lens Color: Blue
- Base: 50 lb pull magnet
- Strap included

- Lens: 360°
- Sizes: Small Safety Lights
- Size: 5.5"H. x 2"W.
- Battery: 1 D cell (not included)
- Weight w/o batteries: 1 oz
- Run time: 120 Hours
- Color: Blue
- Bulb: Five .5 LED's
- Case Material: Polycarbonate with molded switch
- Flash Modes: Single flash
- Beam Distance: Up to 1 mile

ALL SEASON WIPER BLADES

PYLON – BLADES

Part No.	Length	Part No.	Length
848.13	13"	848.20	20"
848.14	14"	848.21	21"
848.15	15"	848.22	22"
848.16	16"	848.240	24"
848.17	17"	848.26	26"
848.18	18"	848.28	28"
848.19	19"		



- Superior structure composed of a steel main frame, poly thermal secondaries and steel tertiaries
- Strategic pivot points provide greater flexibility for proper windshield conformation
- Engineered pressure points provide uniform pressure distribution across entire windshield
- Easy and secure installation
- Sold individually in package

MICHELIN STEALTH HYBRID WIPER BLADES

Part No.	Length	Part No.	Length
848.9.16	16"	848.9.21	21"
848.9.17	17"	848.9.22	22"
848.9.18	18"	848.9.24	24"
848.9.19	19"	848.9.26	26"
848.9.20	20"	848.9.28	28"



- Superior contact across entire blade
- Adapts to your windshield's shape
- Cover protects from debris, ice and snow
- Sleek aerodynamic design
- Available in 16" thru 28" sizes



FUEL FILTERS

Part No.	Application	Part No.	Application	Part No.	Application	Part No.	Application	Part No.	Application
808.61	Universal 5/16"	808.68	Universal 1/4"	808.350	Universal 1/2"	808.610	Universal 5/16"	808.6138	Universal 3/8"

Material/PLASTIC

Material/METAL



BODY CLIPS — 2015 FORD F150

Part No.
971.50217

170 Pieces




SECURITY

MASTER NO. 175 COMBINATION PADLOCKS

- 2" wide body
- Solid brass body for durability
- Hardened steel shackle
- Set your own combination
- 4 digit combination codes

Part No.
604.9009

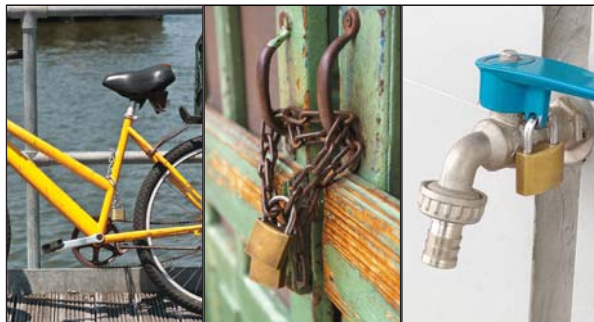


SEALING & SOLDERING JUST GOT BETTER!



Winzer's Solder Seal products are in a transition to convert to lead free.

OUR NEW AND IMPROVED SEALED SOLDER CONNECTORS ARE NOW LEAD FREE!

Sealed Solder Connectors provide a high quality, sealed solder connection that takes the guesswork out of soldering. Soldered terminations provide superior tensile strength and conductivity. DON'T SETTLE FOR ANY CONNECTOR...DEMAND SEALED SOLDER CONNECTORS!

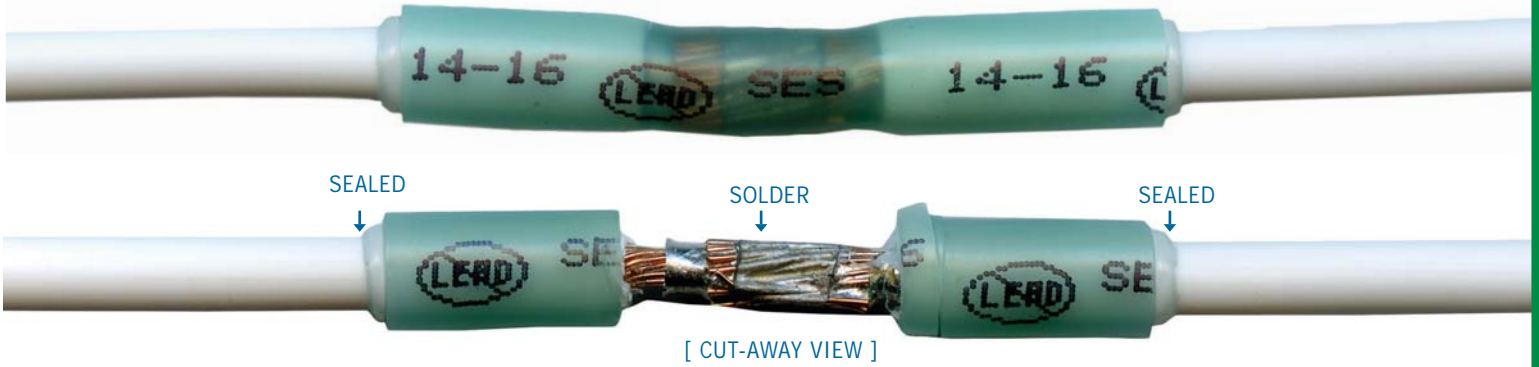

LEAD FREE SOLDER IS STRONGER

* All Solder Seal products with 555 prefix numbers can be found in the Winzer catalog on page 2-1-7. This is a "Transition" From Leaded to Lead-Free Solder and we may ship Lead Solder and Lead-Free solder until all Lead Solder inventory is depleted.

- Lead free solder has greater surface tension
- New solder much less likely to run out of the tubing
- Solder sleeves pre-fluxed to clean metals & provide a quality solder termination
- Solder stays in place which provides greater tensile strength than other solder sleeves


- Better for the environment
- New solder - RoHS compliant
- New solder sleeves are Tin & Bismuth alloy
- Other solder sleeves contain both Lead & Cadmium
- New lead free solder has lower melt temperature (138°C vs 145°C)



REDUCE RECURRING ELECTRICAL PROBLEMS

PROBLEMS:

CORROSION ON WIRE CAUSES VOLTAGE DROP.

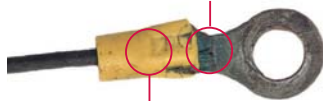

CANNOT SEE WHETHER TERMINAL IS PROPERLY INSTALLED.

WIRE PULLED LOOSE DUE TO STRAIN OR VIBRATION.



STANDARD TERMINAL THICKNESS (RED & BLUE)



.032" THICKNESS

SOLUTIONS:

ADHESIVE-LINED TUBING PREVENTS CORROSION ON THE WIRE.



TRANSLUCENT TUBING ALLOWS VISUAL INSPECTION OF INSTALLATION

SOLDER TERMINATION PROVIDES MAXIMUM TENSILE STRENGTH & CONDUCTIVITY



THICKER TERMINALS - 33% MORE COPPER



.040" THICKNESS



4060 E Plano Parkway
Plano, Texas 75074
800-527-4126

www.winzer.com

Copyright © 2017 Winzer

ORIGINAL SOLDER SLEEVE



ORIGINAL SOLDER CAN BECOME RUNNY

NEW & IMPROVED LEAD FREE SOLDER SLEEVE



NEW SOLDER HAS GREATER SURFACE TENSION = LESS RUNNY

You can download and print this issue on our website, for free!
www.winzer.com/media.htm

Ed. 17 Vol. 12

SERVICE THAT WORKS®